

PORON® EVExtend 4701-43RL



PROPERTY	TEST METHOD	VALUE	
PHYSICAL			
Density, kg /m ³ (lb. / ft ³)	ASTM D 3574-95, Test A	160 (10)	192 (12)
Tolerance, %		± 10	
Thickness, mm (inches)		1.0 – 3.0 (0.039 - 0.118)	1.0 – 3.0 (0.039 - 0.118)
Tolerance, %, ≥2mm		5%	
Tolerance, %, <2mm		7.5%	
Standard Color (Code)		Black (04)	
Compression Force Deflection, Range kPa (psi)	0.51 cm/min (0.2" / min). Strain Rate Force Measured @ 25% Deflection	27-55 (4-8)	41-83 (6-12)
Typical kPa (psi)	Force Measured @ 10% Deflection	32.8 (4.8)	43.4 (7.0)
	Force Measured @ 20% Deflection	36.6 (5.3)	56.5 (8.2)
	Force Measured @ 25% Deflection	39.1 (5.7)	61.1 (8.9)
	Force Measured @ 30% Deflection	42.1 (6.1)	66.3 (9.6)
	Force Measured @ 40% Deflection	50.9 (7.4)	81.5 (11.8)
	Force Measured @ 50% Deflection	66.1 (9.6)	108 (15.6)
	Force Measured @ 60% Deflection	97.9 (14.2)	162 (23.5)
	Force Measured @ 70% Deflection	181 (26.3)	306 (44.4)
	Force Measured @ 80% Deflection	450 (65.2)	728 (106)
Compression Set, % max.	ASTM D 3574-95 Test D @ 23°C (73°F) ASTM D 3574-95 Test D @ 70°C (158°F)	5 5	
Tensile Strength, Min. kPa, (psi)	ASTM D 3574-75 Test E	345 (50)	
Tensile Elongation, % min.,	ASTM D 3574-75 Test E	80	
Tear Strength, kN/m (pli) min	ASTM D 264-91 Die C	1.23 (7)	
ELECTRICAL AND THERMAL			
Thermal Conductivity, W/m-C (BTU-in./hr/ft ² -F)	ASTM C 518-98	0.050 (0.35)	0.052 (0.36)
Dielectric Strength, volts/mil	ASTM D150 measurements at 22°C (72°F) relative humidity, 50% for 24 hours	56	



☎: 618-282-7700

✉: sales@seconrubber.com

🌐: www.seconrubber.com


PROPERTY	TEST METHOD	VALUE	
TEMPERATURE RESISTANCE			
Recommended Constant Use, max.	SAE J-2236	90C	
Recommended Intermittent Use, max.		121C	
Embrittlement	ASTM D 746-98	-20°C	
FLAMMABILITY AND OUTGASSING			
Outgassing, Total Mass Loss (TML) %	Internal Method: 24 hrs @ 125°C (257°F)	0.73	0.66
Outgassing, Water Vapor Regain (WVR) %		0.62	0.51
ENVIRONMENTAL			
Water Absorption, Immersion Testing, % weight gain, typical	ASTM D 570-95	20	
Water Absorption, High Humidity Exposure, % weight gain, typical	ASTM 3568	2	

**Product is supplied on a release PET.

**Thickness availability may vary by construction type. Contact your local sales or customer service representative.

Notes:

- All metric conversions are approximate.
- Additional technical information is available.
- Typical values should not be used for specification limits.

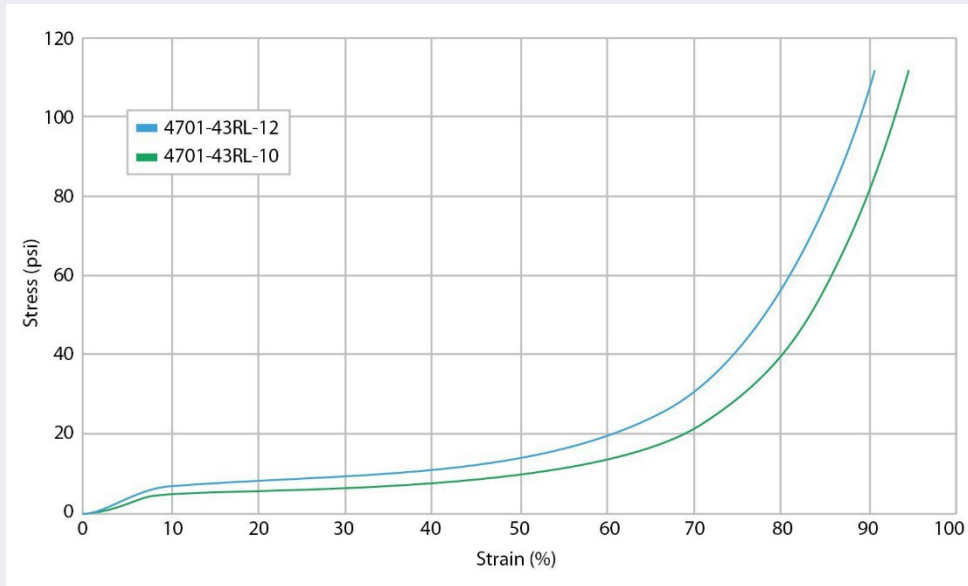

The information contained in this data sheet is intended to assist you in designing with Rogers'

Elastomeric Material Solutions. It is not intended to and does not create any warranties, express or implied, including any warranty of merchantability or fitness for a particular purpose or that the results shown in this data sheet will be achieved by a user for a particular purpose. The user should determine the suitability of Rogers PORON Polyurethane Materials for each application. The Rogers logo, PORON and the PORON logo are trademarks of Rogers Corporation or one of its subsidiaries.

© 2018 Rogers Corporation. All rights reserved. 1218-PDF • Publication #17-406